# INSTALLATION INSTRUCTIONS Part Number: HD-7517 This filter fits: SEE CATALOG FOR CURRENT APPLICATIONS

#### \* FREE K&N<sup>®</sup> decal To register your warranty, please see us online at knfilters.com/register. FREE K&N<sup>®</sup> decal \*

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N Filtercharger® seals properly.

# If you need any assistance please call 1-800-858-3333 to speak with a representative in our Customer Service Center before returning the product.

#### INSTALLATION:

- 1. Remove the dirty air filter assembly.
- 2. Remove the rubber hose from the base of the dirty air filter by pushing it out from the inside. Remove it carefully as you will be re-installing it in the K&N<sup>®</sup> air filter in the next step. (Figs 1-3)
- 3. Install the rubber hose removed in Step 2 by pushing it in from the outside of the base plate. Align the tab on the hose to the notch in the base plate. When correctly installed, the base of the hose will sit flush with the base of the filter, and the hose will be centered in the filter opening. (Fig 4)
- 4. Clean the backing plate and housing.
- 5. Install the K&N<sup>®</sup> filter assembly using the stock gasket and hardware. NOTE: The recommended torque for the three bolts that hold the K&N<sup>®</sup> filter in place is 45in-lbs.
- 6. Install the air filter housing.


### THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.









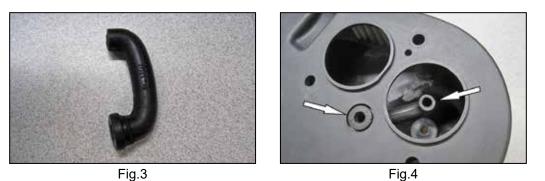

## **CLEANING:**

K&N Engineering, Inc., suggests checking the air filter element periodically for excessive dirt build-up. Depending on your driving conditions, we recommend cleaning your air filter every 50,000 miles. To clean and re-oil, purchase our filter Recharger<sup>®</sup> service kit, part number 99-5050 or 99-5000 and follow the easy instructions.