

INSTALLATION INSTRUCTIONS

REFLEX DRINK HOLDER WITH PERCH MOUNT

6484 CHROME OR 6485 SATIN BLACK

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

⚠ WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

⚠ CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- | | |
|-----------------------|--|
| 1 Reflex Drink Holder | 2 1/4-20 x 2.25" Button Head Cap Screws |
| 1 Perch Mount | 2 M6 x 1.0 x 55mm Button Head Cap Screws |
| 1 Drink Holder Nut | 2 1/4-20 x 2" Button Head Cap Screws |
| 2 6" Cable Ties | 2 Mount Washers |
| | 2 Spacers |

YOU WILL ALSO NEED:

Socket (standard or metric) set, hex bit (standard or metric) set, torx bit set, ratchet, ft-lbs (Nm) torque wrench

NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.


NOTE: UNIVERSAL FITMENT FOR CLUTCH OR BRAKE PERCH MOUNTING BOLTS VERTICAL SPACING CENTER TO CENTER AT 1-1/8" TO 1-11/16" APART. UNIVERSAL BASKET HOLDER WILL ACCEPT MOST AVERAGE SIZED CUPS, CANS, BOTTLES, AND MUGS WITH A 2" TO 3-1/2" DIAMETER.

⚠ CAUTION ENSURE THAT THE INSTALLATION OF THIS PRODUCT DOES NOT INTERFERE WITH THE PROPER OPERATION OF THE MOTORCYCLE BEFORE RIDING.

NOTICE AVOID DAMAGE TO THE MOTORCYCLE. PROTECT PAINTED SURFACES WITH A SOFT CLOTH OR BLANKET.

NOTICE IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT THERE IS ADEQUATE CLEARANCE BETWEEN THE DRINK HOLDER AND ANY PAINTED SURFACES. KURYAKYN IS NOT RESPONSIBLE FOR ANY DAMAGE DUE TO INADEQUATE CLEARANCE.

NOTICE BE AWARE OF ANY CABLES/WIRES THAT COULD POTENTIALLY BE PINCHED OR CRUSHED WHILE USING THIS PRODUCT

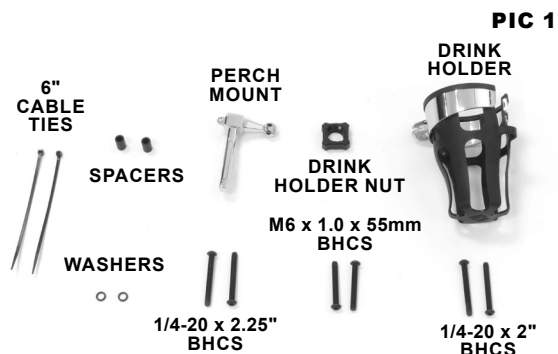

INSTALLATION INSTRUCTIONS

REFLEX DRINK HOLDER WITH PERCH MOUNT

-CONTINUED-

- STEP 2** Refer to PIC 2. Locate provided Perch Mount. Determine which side it will mount to, clutch or brake side. The arm of the mount should point towards the center of the bike. Depending on what side it will mount to, you may have to dismantle the ball mount stud, external-tooth lock washer and cap nut from the perch mount and reassemble it on the opposite side of the perch mount.

Note: Not all motorcycle fitments allow for both clutch and brake side installment options. Refer to kuryakyn.com for complete make/model fitment information.

- STEP 3** Place a clean, soft blanket over the gas tank to protect the paint.

- STEP 4** Remove the bottom screw securing the clutch or brake perch halves. Set it aside, it will not be used again.

- STEP 5** Determine which provided screw to use, either the metric or standard, by comparing threads on the provided screws to the threads from the screw that was removed. The 1/4"-20 x 2-1/4" screws are generally used on older H-D motorcycles, the 1/4"-20 x 2" screws on newer H-D motorcycles, and the M6 x 1.0 x 55mm on Metric motorcycles.

- STEP 6** Refer to PIC 3. Place the washer over the screw, then insert it through bottom mounting hole on the perch mount, followed by the spacer. Add a small amount of anti-seize to the screw end.




- STEP 7** Refer to PIC 4. Align and loosely secure the perch mount assembly with the bottom mounting hole of the perch on the motorcycle.

- STEP 8** Remove the upper screw securing the perch mounting halves. Set it aside, it will not be used again.

- STEP 9** Rotate the perch mount up into position and install the remaining screw (with a dab of anti-seize), washer, and spacer as done in Step 6.

- STEP 10** Fully tighten all hardware.

TORQUE VALUE FOR PERCH MOUNT FASTENERS:
9ft-lbs (12.20 Nm)

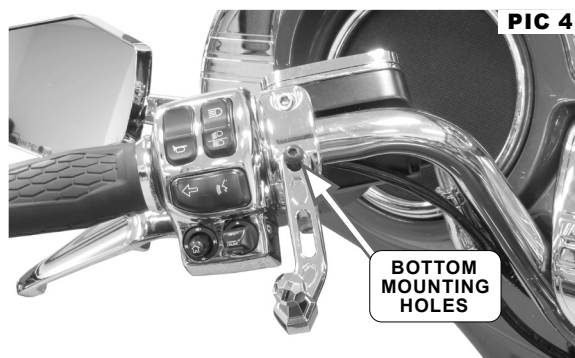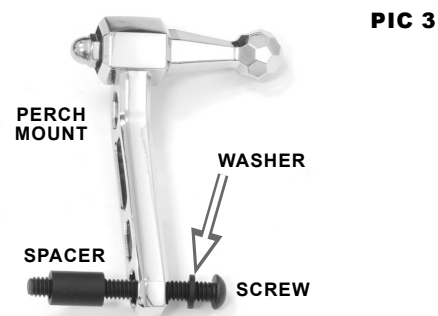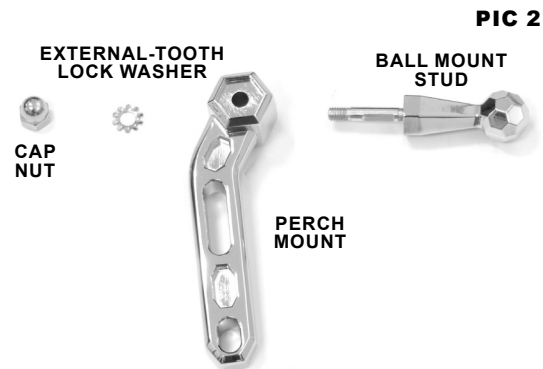

KURYAKYN.COM

866 277 9598 | INFO@KURYAKYN.COM

454 COUNTY ROAD VV SOMERSET, WI 54025



INSTALLATION INSTRUCTIONS

REFLEX DRINK HOLDER WITH PERCH MOUNT

-CONTINUED-

- STEP 11** Refer to PIC 6. Locate provided Drink Holder Nut. Place the fastener onto the ball mount of the installed mount, the fastening side facing out towards the ball mount.

Note: Drink Holder Nut might be located on the drink holder's mounting base, or individually within the packaging it came in.

- STEP 12** Refer to PIC 7. Locate provided Drink Holder. Align and press the base of the Drink Holder over the ball mount of the installed mount. Use the Drink Holder Nut, located on the installed mount, to secure the assembly in place.



PIC 6

⚠ WARNING ENSURE THAT THERE IS CLEARANCE AT ALL POINTS WHEN THE HANDLEBARS ARE TURNED, INSUFFICIENT CLEARANCE MAY CAUSE DAMAGE TO THE MOTORCYCLE OR CAN CAUSE LOSS OF CONTROL THAT COULD RESULT IN SEVERE INJURY OR DEATH.

⚠ WARNING TO PREVENT POSSIBLE LOSS OF CONTROL, WHICH COULD RESULT IN A POSSIBLE INJURY OR DEATH, WE DO NOT RECOMMEND REMOVING AND REPLACING OBJECTS IN THE HOLDER WHILE RIDING THE MOTORCYCLE.

NOTICE THE ADJUST-ABILITY OF THE DRINK HOLDER WAS NOT INTENDED TO PREVENT SPILLS.

NOTICE ENSURE THAT THE DRINK HOLDER IS SECURE ON THE MOUNT AND THAT THE MOUNT IS SECURE ON THE MOTORCYCLE. KURYAKYN IS NOT RESPONSIBLE FOR ANY BELONGINGS THAT ARE STOLEN OR DAMAGED FROM USE OF THIS DRINK HOLDER OR FROM THE DRINK HOLDER OR MOUNT NOT BEING PROPERLY SECURED TO THE MOTORCYCLE. IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.

NOTICE IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.



PIC 7



INSTALLATION INSTRUCTIONS

REFLEX DRINK HOLDER WITH PERCH MOUNT

-CONTINUED-

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at www.kuryakyn.com/legal-notice.

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at www.kuryakyn.com/legal-notice

